

Shield - Foot Valve



▲ Model: SD-FV250

Materials List


No	Part	Material
1	Slide Bar	Brass
2	Body	Cast Iron or Ductile Iron
3	Disc	Cast Iron or Ductile Iron
4	Gasket	NBR
5	Washer	Carbon steel or Cast Iron or Ductile Iron
6	Screw	Carbon Steel
7	Gasket	NBR
8	Seat Disc	Cast Iron or Ductile Iron
9	Sleeve Ring Lock	Cast Iron or Ductile Iron
10	Nut	Carbon steel
11	Sieve	Stainless steel or Zinc - plated carbon steel

Application

1. Flange can be according DIN, BS and ANSI standard
2. For water and neutral liquids

Test

Working Pressure		16 bars
Test Pressure	Sheel	24 bars
Test Pressure	Seat	17.6 bars

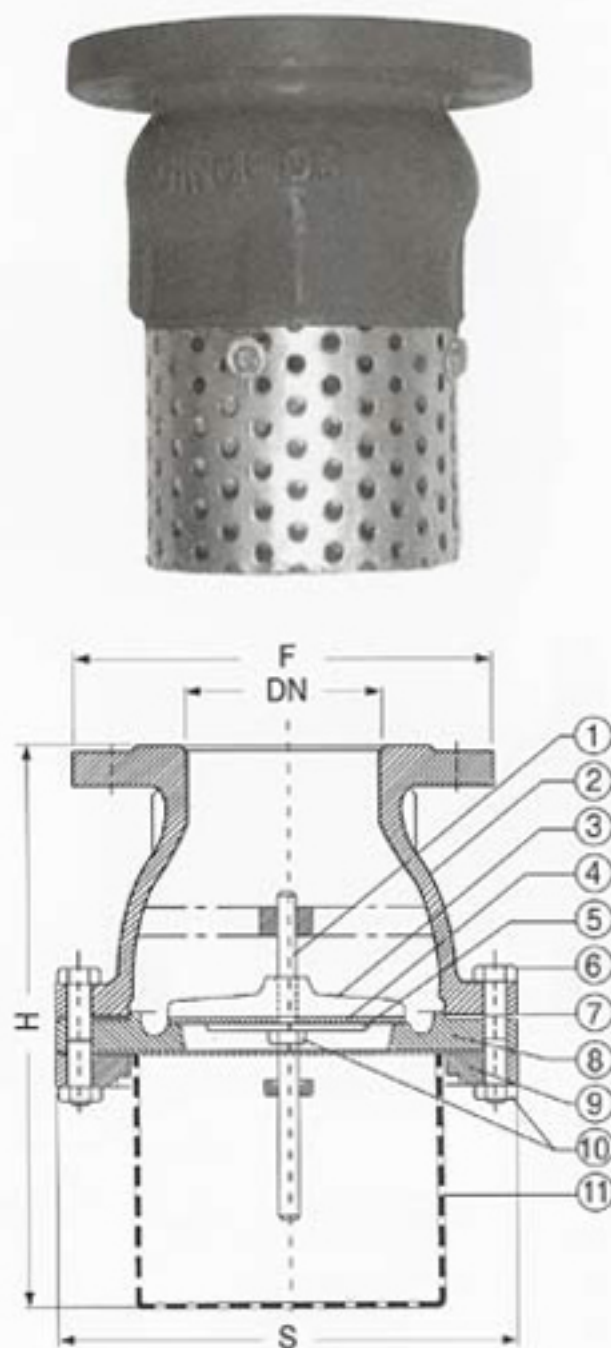

Dimensions

Size	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"
F	165	185	200	220	250	285	340	405	460
H	185	220	240	265	320	370	460	560	670
S	165	185	200	240	275	315	390	485	565

Unit: mm

Note: The dimation of "F" can be according DIN, BS and ANSI standard.