

SI-90

MULTIFUNCTIONAL INTELLIGENT SYSTEM
FIRE/GAS/EXTINGUISHING



SHIELD
TRUSTED WORLDWIDE

SIL2 **SIL3**

SIGNALING





About Shield

Competence and innovation driven by consistent market development and customer requirements have shaped the successful development of the SHIELD Brand. The extensive product range of the market leader in the field of fire detection technology contains single, individually integrable system performances. In this way, a customized overall fire protection concept can be planned and realized for every need with optimally synchronized products.

Performance is in international demand, SHIELD is among the highly accredited fire alarm companies that meet rigorous British and American standards for all projects from small conventional system to multi-site networks. Certifications such as UL and FM approvals have earned SHIELD a world-renowned reputation with quality products and powerful solutions.

A strong brand is generally known to be a secure basis for close and lasting customer relationships. In accordance with this, SHIELD uses available potential in order to keep on growing in a dynamic competitive environment. And at the same time, SHIELD stands for innovative and high quality fire alarm and evacuation systems.

We invite you to explore and visit our new website www.shieldglobal.com. You can also send us your feedback and inquiry through our user-friendly online forms.

Index

Multifunctional Intelligent Control Panel	01
Initiating Devices	05
Manual Call Points	08
Interfacing Modules	09
Notification Appliances	11
Input / Output Cards	13
System Architecture	18
Graphic Supervision Program	19

Multifunctional Intelligent Control Panel

SI-90



Overview

The SHIELD SI-90 panel is intended for the protection, in complete safety, of high technologic and economic content plants and equipment. It is designed to meet the heaviest functional reliability and availability requirements, particularly of the companies that operate in the field of energy production and transformation, where it shows excellent resistance to electromagnetic disturbances. Though the panel looks like a safety PLC but, differently from this, it is certified, by European laboratories, to perform the envisaged protection functions in compliance with the applicable regulations.

The panel is composed of specialised cards, installed in 19" racks, whose type and quantity depends on specific application requirements, i.e. on the plant/equipment to be protected. The cards, which have their own "intelligence", are programmed for active/passive fire protection, gas detection, intruder alarm and technologic control management.

Moreover, the SHIELD SI-90 can interact with other panels of the same type, as well as with supervisory and SCADA systems, through both proprietary and standard protocols, such as Ethernet TCP/IP and Modbus.

Why SIL ?

- Redundant CPU, I/O cards and Power Supply available on the panel to ensure the continuous operation in case of one or more failures.
- Hot-swap: CPU, I/O cards and Power Supply can be replaced without switching off the panel, thus maintaining system and safety functionality.
- Extreme reduction of false below acceptable levels out of 100 signals there is a possibility for only one fault.
- High level of Reliability, Availability and Maintainability (RAM) for the software and hardware of the system.
- High tolerance and stability over electromagnetic noise.



Multifunctional Intelligent Control Panel

SI-90

■ Redundancy

With the intention of increasing the functional reliability in the hardware, the system is built with two CPU, Power Supply & I/O Cards. Ensuring the performance of the system to stay high and uninterrupted in case of any failure.

■ Reliability

The SI-90 system has been designed to meet the heaviest functional reliability and availability requirements, particularly of the companies that operate in the field of energy production and transformation, where it shows excellent resistance to electromagnetic disturbance and a continuous operability in difficult environmental conditions.

■ Flexibility

The SI-90 system is extremely flexible to all project requirements making it suitable for addressable & conventional Fire Detection, Gas Detection & Fire Extinguishant applications. The maximum number of devices for each control panel ranges from 9,828 to 16,380 field devices. Integration with Access Control, CCTV & BMS systems are also possible.

■ Modular

Shield SI-90 stands versatile with modular design approach. System composes of several individual components that could be group together to perform specific function. Adding or replacing any component will be much easier without effecting rest of the system.

■ Hot-Swap

The system is engineered to meet the safety integrity level standards. The CPU, I/O card and power supply can be replaced without switch off the panel.

■ Networkable

Control panels are divided into two categories: Master (receiving) and Slave (transmitting). Each control panel in the network can be indifferently slave only, master only or slave/master. A maximum of 99 control panels can be connected to each other in a network.

Multifunctional Intelligent Control Panel

SI-90

TECHNICAL DATA

Supply voltage	110 to 240 V AC (-15% + 10%)
Nominal frequency of the power supply	50 to 60Hz
Power supply set output voltage	25Vdc ±2%
Serial communication interface	2 x RS232
Ethernet communication interface	10/100BaseT with RJ45 connector
Maximum number of programmable zones	300 fire alarm zones + 300 burglar alarm zones
Maximum number of programmable points per zone	99 inputs 99 outputs 99 links
Exportable local variables via network	Max. 250
Importable remote variables via network	Max. 999
System variables (Local)	64
Time slots with holiday management	10 (with 10 intervals each)
CPU redundancy	Standard
I/O bus redundancy	Optional (only in 2R, 1-10 and 1-6R versions)
Card redundancy	Optional (only in 2R, 1-10 and 1-6R versions)
Hot swap capability	Available for all cards
Centralization between control panels	Via LAN network with TCP protocol
Supervisory system	Max. three supervisors per control panel
Management of time slots	10 categories with management of holidays
Default outputs	16 SPDT contacts
Default inputs	10 opto isolated inputs
Available protocols	MODBUS RTU

STANDARDS


DESCRIPTION

EN-54-2:1997+A1:2006	Fire detection and fire alarm systems Part 2: Control and indicating equipment
EN-54-4: 1997+A1:2002+A2:2006	Fire detection and fire alarm systems Part 4: Power supply equipment
EN-12094-1:2004	Fixed firefighting systems. Components for gas extinguishing systems. Requirements and test methods for electrical automatic control and delay devices
EN-60950-1:2001	Information technology equipment – Safety - part 1: General requirements
EN 60079-0	Part 0: Explosive atmospheres. Equipment. General requirements
EN 60079-29-1	Part 29-1: Gas detectors - Performance requirements of detectors for flammable gases
CEI 79-2:1998 + Ab2000	Italian standard. Impianti antieffrazione, antintrusione, antifurto e antiaggressione. Norme particolari per le apparecchiature.
IEC-61508 Edition 2.0	Functional safety of electrical/electronic/programmable electronic safety-related systems
UL 864 9th Edition	Standard for Control Units and Accessories for Fire Alarm Systems
UL 2017	General-Purpose Signaling Devices and Systems

Multifunctional Intelligent Control Panel

SI-90

SIL2 SIL3

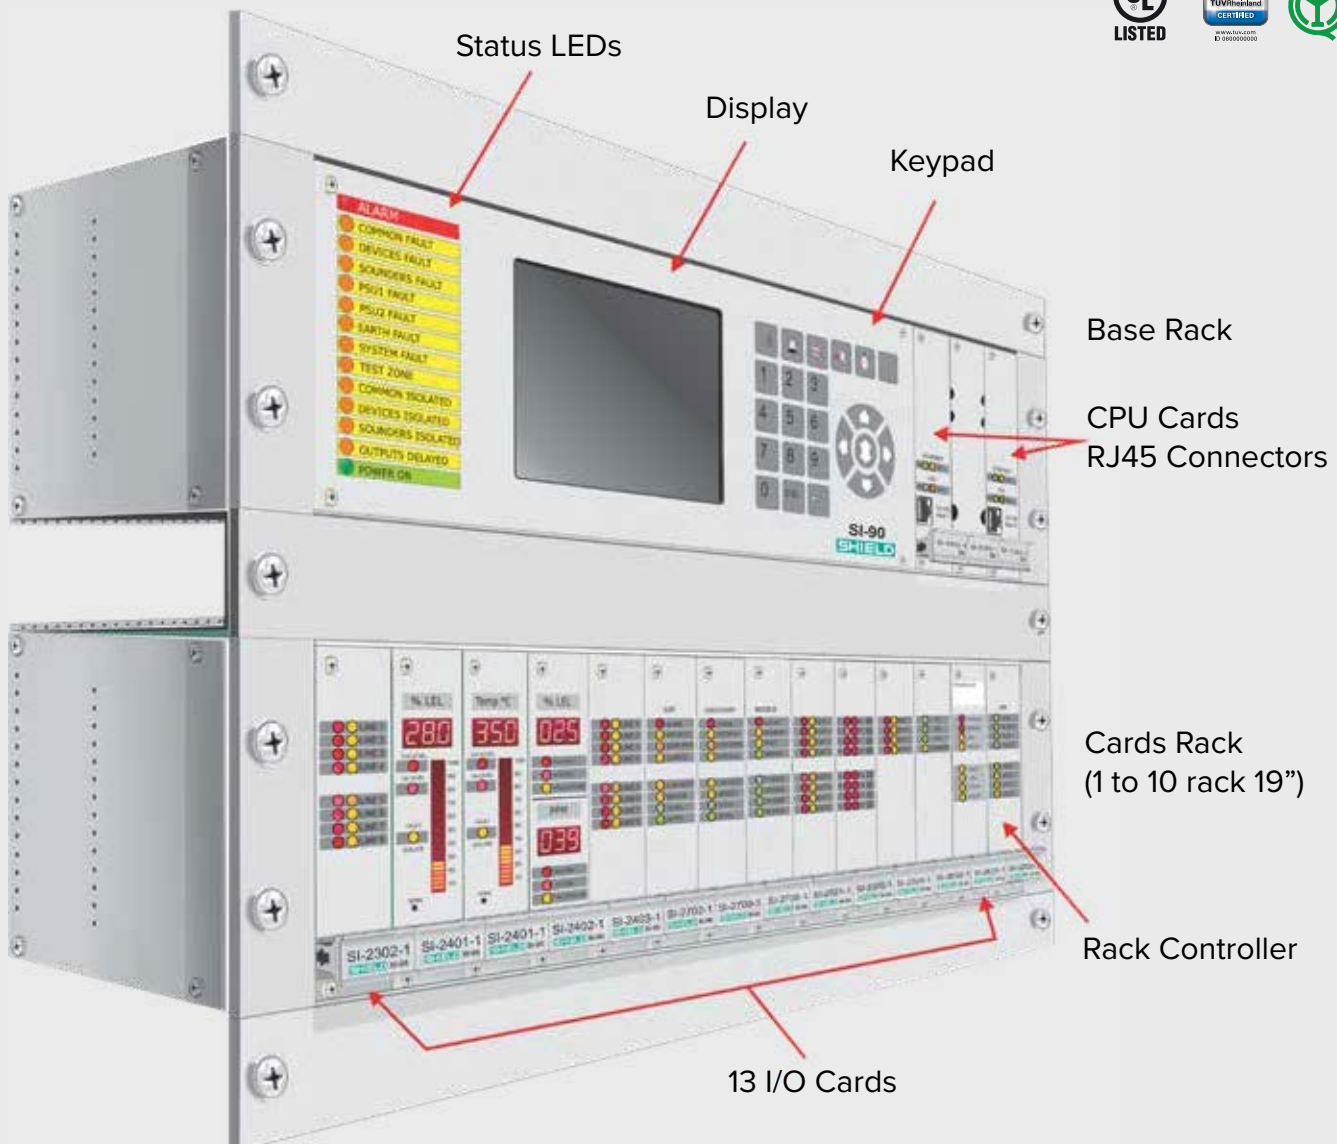

ORDERING INFORMATION

UL RANGE SI-90 SYSTEM

SI-90/MB	Base + 8 I/O cards in a wall mount cabinet
SI-90/U	Base rack + 6 racks with 13 slots, each, for I/O cards in a wall mount cabinet

EN RANGE SI-90 SYSTEM

SI-90/L	Base + 8 I/O cards in a wall mount cabinet
SI-90/1R	Base rack + 1 rack with 13 slots for I/O cards in a wall mount cabinet
SI-90/2R	Base rack + 2 racks with 13 slots, each, for I/O cards in a wall mount cabinet
SI-90/1-10R	Base rack + up to 10 racks with 13 slots, each, for I/O cards in a free standing cabinet





Initiating Devices



The SHIELD range of Addressable Initiating Devices are advanced in design, performance and offers unique features that benefit both the installer and the end user.



SHIELD Fire Detectors uses a 'central intelligence' system where all the decisions are made by the control panel. Each detector is addressed using SHIELD's patented XPERT Card and supplied with the mounting bases.

The SHIELD product line includes photo-electric smoke detectors, heat detectors, multisensors and intrinsically safe detectors.


Initiating Devices Detectors


PRODUCT	TECHNICAL DATA
 <p>SIL-A8021</p> <p>SIL2 SIL3</p> <p> Cert/LPCB ref. 010q/03</p>	Description
	Optical Smoke Detector
	Detection principle
	Photo-electric detection of light scattered in a forward direction by smoke particles
	Sensor
	Silicon PIN photo-diode
	Operating temperature
	-40 °C to +70 °C
	Operating voltage
	17-28 V DC
	Quiescent current
	300 µA
	Alarm current, LED illuminated
	3.5 mA
	IP Rating
	IP44
	Standards & approvals
	EN 54-7, LPCB & SIL
	Dimensions (D x H)
	100 mm x 42 mm (50 mm height with Mounting Base)


PRODUCT	TECHNICAL DATA
 <p>SIL-A8022</p> <p>SIL2 SIL3</p> <p> Cert/LPCB ref. 010p/03</p>	Description
	Heat Detector
	Detection principle
	Heat sensitive resistance
	Storage temperature
	-40 °C to +80 °C
	Operating voltage
	17-28 V DC
	Quiescent current
	400 µA
	Alarm current, LED illuminated
	3.5 mA
	IP Rating
	IP54
	Standards & approvals
	EN 54-5, LPCB & SIL
	Dimensions (D x H)
	100 mm x 42 mm (50 mm height with Mounting Base)

PRODUCT	TECHNICAL DATA
 <p>SIL-A8023</p> <p>SIL2 SIL3</p> <p> Cert/LPCB ref. 010h/03</p>	Description
	Multisensor Detector
	Detection principle
	Smoke: Photo-electric detection of light scattered by smoke particles Heat: Temperature-dependent resistance
	Operating temperature
	-40 °C to +70 °C
	Operating voltage
	17-28 V DC
	Quiescent current
	400 µA
	Alarm current, LED illuminated
	3.5 mA
	IP Rating
	IP44
	Standards & approvals
	EN 54-5, EN 54-7, LPCB & SIL
	Dimensions (D x H)
	100 mm x 42 mm (50 mm height with Mounting Base)



Initiating Devices Detectors



PRODUCT	TECHNICAL DATA
 <p>SIL-A8011</p> <p>SIL2 SIL3</p> <p>LPCB Cert/LPCB ref. 010q/22</p>	<p>Description Intrinsically Safe Optical Smoke Detector</p>
	<p>Detection principle Photo-electric detection of light scattered in a forward direction by smoke particles</p>
	<p>Sensor Silicon PIN photo-diode</p>
	<p>Operating temperature -20 °C to +40 °C (T5) -20 °C to + 60 °C (T4)</p>
	<p>Operating voltage 14-22 V DC</p>
	<p>Quiescent current 340 µA</p>
	<p>Alarm current, LED illuminated 4 mA</p>
	<p>IP Rating IP23D</p>
	<p>Standards & approvals EN 54, IEC61508-1, BS EN60079-11, LPCB & SIL</p>
	<p>Dimensions (D x H) 100 mm x 42 mm (50 mm height with Mounting Base)</p>



PRODUCT	TECHNICAL DATA
 <p>SIL-A8012</p> <p>SIL2 SIL3</p> <p>LPCB Cert/LPCB ref. 010p/23</p>	<p>Description Intrinsically Safe Heat Detector</p>
	<p>Detection principle Linear approximation over temperature range 25 °C to 90 °C</p>
	<p>Sensor Single NTC thermistor</p>
	<p>Operating temperature -20 °C to +40 °C (T5) -20 °C to + 60 °C (T4)</p>
	<p>Operating voltage 14-22 V DC</p>
	<p>Quiescent current 300 µA</p>
	<p>Alarm current, LED illuminated 2 mA</p>
	<p>IP Rating IP53</p>
	<p>Standards & approvals EN54, IEC61508-1, 2, LPCB & SIL</p>
	<p>Dimensions (D x H) 100 mm x 42 mm (50 mm height with Mounting Base)</p>

PRODUCT	TECHNICAL DATA
 <p>SEN-A4001</p> <p>SIL-A8058</p> <p>LPCB Cert/LPCB ref. 010q/03 Cert/LPCB ref. 010q/22</p>	<p>Description Standard and Intrinsically Safe Detector Base</p>
	<p>Operating temperature -20 °C to +60 °C</p>
	<p>Humidity (no condensation or icing) 0% to 95% RH</p>
	<p>Dimensions (D x H) 100 mm x 20 mm</p>
	<p>Weight 63g</p>
	<p>Materials Base: White flame-retardant polycarbonate Terminals: Nickel plated stainless steel</p>

Manual Call Points

PRODUCT		TECHNICAL DATA
 <p>SIL² SIL³</p> <p> <small>Cert/LPCB ref. 010w/01</small></p> <p>SIL-A7011</p>	Description	Manual Call Point
	Operating voltage	17-28 V DC
	Communication protocol	5-9 V peak to peak
	Quiescent current	100 µA
	Alarm current (LED On)	4 mA
	Operating temperature (ambient)	-20 °C to 60 °C
	IP rating	IP45
	Standards & approvals	EN 54-11, EN 54-17, LPCB & SIL
	Dimensions (H x W x D)	93 mm x 89 mm x 59.5 mm

PRODUCT		TECHNICAL DATA
 <p>SIL² SIL³</p> <p> <small>Cert/LPCB ref. 010w/06</small></p> <p>SIL-A7023</p>	Description	Manual Call Point - Weatherproof
	Operating voltage	17-28 V DC
	Quiescent current	100 µA
	Alarm current (LED On)	4 mA
	Operating temperature	-30 °C to +70 °C
	IP Rating	IP56
	Standards & approvals	EN 54-11, EN 54-17, LPCB & SIL
	Dimensions (H x W x D)	114 mm x 114 mm x 74 mm

PRODUCT		TECHNICAL DATA
 <p>SIL² SIL³</p> <p> <small>Cert/LPCB ref. 010n/09</small></p> <p>SIL-A7033</p>	Description	Intrinsically Safe Manual Call Point
	Supply Wiring	Two wire supply, polarity sensitive
	Supply voltage	14-22 V DC
	Quiescent current	300 µA
	Alarm current (LED On)	1.3 mA
	Operating temperature (ambient)	-20 °C to 70 °C -20 °C to 45 °C (T5) -20 °C to 60 °C (T4)
	Standards and Approvals	EN 54-11, IEC65108-1, 2, BS EN60079-0,11, LPCB & SIL
	IP Rating	IP65
	Dimensions (H x W x D)	94.5 mm x 99 mm x 73.5 mm





Interfacing Modules



The shield interface modules are intended for use with the intelligent addressable fire detection system, where each module is individually addressed by the built-in DIP switches.



These includes the interfaces with other services or an existing system which is otherwise incompatible to allow fire signal to be passed in both directions.

Interfacing Modules

Modules & Accessories

PRODUCT	TECHNICAL DATA																												
 <p>SIL-A6061</p> <p>SIL² SIL³</p> <p> <small>Cert/LPCB ref. 010ah/06</small></p>	<table> <tr> <td>Description</td><td>Input / Output Unit - with Isolator</td></tr> <tr> <td>Minimum loop operating voltage in normal conditions</td><td>17 V DC</td></tr> <tr> <td>Maximum loop operating voltage</td><td>28 V DC</td></tr> <tr> <td>Switch input monitoring voltage</td><td>9-11 V DC (open-circuit condition)</td></tr> <tr> <td>Maximum cable resistance</td><td>50 Ω</td></tr> <tr> <td>Contact rating (inductive or resistive)</td><td>1 A at 30 V AC or DC</td></tr> <tr> <td>Wetting current</td><td>10 µA at 10 m V DC</td></tr> <tr> <td>On resistance</td><td>0.2 Ω</td></tr> <tr> <td>Maximum continuous current</td><td>1 A</td></tr> <tr> <td>Maximum switching current</td><td>3 A</td></tr> <tr> <td>Operating temperature (ambient)</td><td>-20 °C to 70 °C</td></tr> <tr> <td>IP rating</td><td>IP54</td></tr> <tr> <td>Standards and approvals</td><td>EN54-17, EN54-18, IEC61508-1, LPCB & SIL</td></tr> <tr> <td>Dimensions (H x W x D)</td><td>90 mm x 150 mm x 48 mm</td></tr> </table>	Description	Input / Output Unit - with Isolator	Minimum loop operating voltage in normal conditions	17 V DC	Maximum loop operating voltage	28 V DC	Switch input monitoring voltage	9-11 V DC (open-circuit condition)	Maximum cable resistance	50 Ω	Contact rating (inductive or resistive)	1 A at 30 V AC or DC	Wetting current	10 µA at 10 m V DC	On resistance	0.2 Ω	Maximum continuous current	1 A	Maximum switching current	3 A	Operating temperature (ambient)	-20 °C to 70 °C	IP rating	IP54	Standards and approvals	EN54-17, EN54-18, IEC61508-1, LPCB & SIL	Dimensions (H x W x D)	90 mm x 150 mm x 48 mm
Description	Input / Output Unit - with Isolator																												
Minimum loop operating voltage in normal conditions	17 V DC																												
Maximum loop operating voltage	28 V DC																												
Switch input monitoring voltage	9-11 V DC (open-circuit condition)																												
Maximum cable resistance	50 Ω																												
Contact rating (inductive or resistive)	1 A at 30 V AC or DC																												
Wetting current	10 µA at 10 m V DC																												
On resistance	0.2 Ω																												
Maximum continuous current	1 A																												
Maximum switching current	3 A																												
Operating temperature (ambient)	-20 °C to 70 °C																												
IP rating	IP54																												
Standards and approvals	EN54-17, EN54-18, IEC61508-1, LPCB & SIL																												
Dimensions (H x W x D)	90 mm x 150 mm x 48 mm																												

PRODUCT	TECHNICAL DATA																												
 <p>SIL-A6062</p> <p>SIL² SIL³</p> <p> <small>Cert/LPCB ref. 010ah/07</small></p>	<table> <tr> <td>Description</td><td>Output Unit - with Isolator</td></tr> <tr> <td>Minimum loop operating voltage in normal conditions</td><td>17 V DC</td></tr> <tr> <td>Maximum loop operating voltage</td><td>28 V DC</td></tr> <tr> <td>Switch-on surge, max 100ms</td><td>3 mA</td></tr> <tr> <td>Quiescent</td><td>400 µA</td></tr> <tr> <td>Relay operated</td><td>1.8 mA</td></tr> <tr> <td>Relay output contact rating at 30V AC or DC</td><td>1 A (inductive or resistive)</td></tr> <tr> <td>Maximum continuous current</td><td>1 A</td></tr> <tr> <td>Maximum switching current</td><td>3 A</td></tr> <tr> <td>Operating temperature</td><td>-20 °C to 70 °C</td></tr> <tr> <td>Humidity (no condensation)</td><td>0-95%</td></tr> <tr> <td>IP rating</td><td>IP54</td></tr> <tr> <td>Standards and approvals</td><td>EN54-17, EN54-18, IEC61508-1, LPCB & SIL</td></tr> <tr> <td>Dimensions (H x W x D)</td><td>90 mm x 150 mm x 48 mm</td></tr> </table>	Description	Output Unit - with Isolator	Minimum loop operating voltage in normal conditions	17 V DC	Maximum loop operating voltage	28 V DC	Switch-on surge, max 100ms	3 mA	Quiescent	400 µA	Relay operated	1.8 mA	Relay output contact rating at 30V AC or DC	1 A (inductive or resistive)	Maximum continuous current	1 A	Maximum switching current	3 A	Operating temperature	-20 °C to 70 °C	Humidity (no condensation)	0-95%	IP rating	IP54	Standards and approvals	EN54-17, EN54-18, IEC61508-1, LPCB & SIL	Dimensions (H x W x D)	90 mm x 150 mm x 48 mm
Description	Output Unit - with Isolator																												
Minimum loop operating voltage in normal conditions	17 V DC																												
Maximum loop operating voltage	28 V DC																												
Switch-on surge, max 100ms	3 mA																												
Quiescent	400 µA																												
Relay operated	1.8 mA																												
Relay output contact rating at 30V AC or DC	1 A (inductive or resistive)																												
Maximum continuous current	1 A																												
Maximum switching current	3 A																												
Operating temperature	-20 °C to 70 °C																												
Humidity (no condensation)	0-95%																												
IP rating	IP54																												
Standards and approvals	EN54-17, EN54-18, IEC61508-1, LPCB & SIL																												
Dimensions (H x W x D)	90 mm x 150 mm x 48 mm																												

PRODUCT	TECHNICAL DATA																
 <p>SIL-A9099</p> <p>SIL² SIL³</p> <p> <small>Cert/LPCB ref. 010ag/14</small></p>	<table> <tr> <td>Description</td><td>Intrinsically Safe Protocol Translator Single Channel</td></tr> <tr> <td>Supply voltage</td><td>19-28 V DC</td></tr> <tr> <td>Modulation voltage at translator</td><td>5 to 9 Volts peak to peak</td></tr> <tr> <td>Input current (no load condition)</td><td>1.0 mA max - Single Channel 2.0 mA max - Dual Channel</td></tr> <tr> <td>Output voltage (to barrier)</td><td>16.5 V to 19 V</td></tr> <tr> <td>Operating temperature</td><td>-20 °C to +60 °C</td></tr> <tr> <td>Standards & approvals</td><td>LPCB & SIL</td></tr> <tr> <td>Dimensions (H x W x D)</td><td>110 mm x 92.5 mm x 20 mm</td></tr> </table>	Description	Intrinsically Safe Protocol Translator Single Channel	Supply voltage	19-28 V DC	Modulation voltage at translator	5 to 9 Volts peak to peak	Input current (no load condition)	1.0 mA max - Single Channel 2.0 mA max - Dual Channel	Output voltage (to barrier)	16.5 V to 19 V	Operating temperature	-20 °C to +60 °C	Standards & approvals	LPCB & SIL	Dimensions (H x W x D)	110 mm x 92.5 mm x 20 mm
Description	Intrinsically Safe Protocol Translator Single Channel																
Supply voltage	19-28 V DC																
Modulation voltage at translator	5 to 9 Volts peak to peak																
Input current (no load condition)	1.0 mA max - Single Channel 2.0 mA max - Dual Channel																
Output voltage (to barrier)	16.5 V to 19 V																
Operating temperature	-20 °C to +60 °C																
Standards & approvals	LPCB & SIL																
Dimensions (H x W x D)	110 mm x 92.5 mm x 20 mm																






Notification Appliances



Shield provides a wide range of audible/visual indication loop powered devices which serves the requirement for both the indoor/outdoor application as per the EN 54-3 standards. These Includes;


- ▶ Open Area Sounder.
- ▶ Open Area Sounder Beacon.
- ▶ Open Area Beacon.

Notification Appliances

Sounders & Beacons

PRODUCT		TECHNICAL DATA		
 SEN-A4021	  <small>Cert/LPCB ref. 010ak/01</small>	Description	Open Area Sounder	
		Operating voltage	17-28 V DC (polarity sensitive)	
		Protocol pulses	5-9 V	
		Current consumption at 24V	switch-on surge	1.2 mA for <1 sec
			quiescent	333 µA
			alarm, sounder 92/100dB(A)	5 mA
			alarm, sounder beacon	8 mA
			alarm, beacon	3.1 mA
		Operating temperature	-10 °C to 55 °C	
		Maximum sound output	100 dB(A)	
IP Rating	IP65			
Dimensions (D x H)	104 mm x 97.5 mm			

PRODUCT		TECHNICAL DATA		
 SEN-A4022	<div><div>SIL2</div><div>SIL3</div></div> <div> Cert/LPCB ref. 010ak/03</div>	Description	Open Area Sounder Beacon	
		Operating voltage	17-28 V DC (polarity sensitive)	
		Current consumption at 24V	switch-on surge	1.2 mA for <1 sec
			quiescent	333 µA
			alarm, sounder 92/100dB(A)	5 mA
			alarm, sounder beacon	8 mA
			alarm, beacon	3.1 mA
		Operating temperature	-10 °C to 55 °C	
		Maximum sound output	100 dB(A)	
		IP Rating	IP65	
Dimensions (D x H)	104 mm x 97.5 mm			

PRODUCT	TECHNICAL DATA		
 SEN-A4023	Description	Open Area Beacon	
	Operating voltage	17-28 V DC (polarity sensitive)	
	Current consumption at 24V	switch-on surge	1.2 mA for <1 sec
		quiescent	333 μA
		alarm, sounder 92/100dB(A)	5 mA
		alarm, sounder beacon	8 mA
		alarm, beacon	3.1 mA
	Operating temperature	-10 °C to 55 °C	
	Maximum sound output	100 dB(A)	
	IP Rating	IP65	
Dimensions (D x H)	104 mm x 97.5 mm		






Input / Output Cards




The SI-90/1-10R model is a modular unit to install up to 11 19" 3-unit high anodized aluminium racks; they will be installed in a steel cabinet with revolving rack and acrylic glass door.




The first rack includes the Base with one or two CPUs, the operator interface display and the keyboard. The other racks are composed by one rack controller and 13 slots for installation of I/O cards.

These I/O cards will be arranged by type and number according to the requirements of the system to be protected. Each card is connected to field devices by a flat cable and an electronic terminal block fitted on a DIN bar at the bottom of the switchboard; alternatively, cards can be connected to field devices by pre-wired connectors connected to electromechanical terminal blocks.



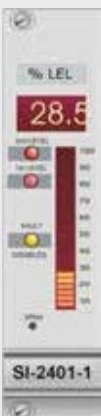

Input / Output Cards





PRODUCT	TECHNICAL DATA																						
 <p>SI-2709-1</p> <p>SIL2 SIL3</p> <p>SIGNALING UL LISTED</p> <p> </p>	<table> <tr> <td>Description</td><td>Addressable Loop Control Card</td></tr> <tr> <td>Application</td><td>Suitable for addressable fire detection devices</td></tr> <tr> <td>Redundancy</td><td>No</td></tr> <tr> <td>Number of devices per loop</td><td>127</td></tr> <tr> <td>Loop maximum current</td><td>400 mA</td></tr> <tr> <td>Supply voltage</td><td>22 to 29 V DC</td></tr> <tr> <td>Quiescent current</td><td>90mA</td></tr> <tr> <td>Operating temperature</td><td>-5 to +50 °C</td></tr> <tr> <td>Storage temperature</td><td>-30 to +80 °C</td></tr> <tr> <td>Maximum humidity</td><td>95% (RH) non condensing</td></tr> <tr> <td>Hot swap capability</td><td>yes</td></tr> </table>	Description	Addressable Loop Control Card	Application	Suitable for addressable fire detection devices	Redundancy	No	Number of devices per loop	127	Loop maximum current	400 mA	Supply voltage	22 to 29 V DC	Quiescent current	90mA	Operating temperature	-5 to +50 °C	Storage temperature	-30 to +80 °C	Maximum humidity	95% (RH) non condensing	Hot swap capability	yes
Description	Addressable Loop Control Card																						
Application	Suitable for addressable fire detection devices																						
Redundancy	No																						
Number of devices per loop	127																						
Loop maximum current	400 mA																						
Supply voltage	22 to 29 V DC																						
Quiescent current	90mA																						
Operating temperature	-5 to +50 °C																						
Storage temperature	-30 to +80 °C																						
Maximum humidity	95% (RH) non condensing																						
Hot swap capability	yes																						





PRODUCT	TECHNICAL DATA																										
 <p>SI-2302-1</p> <p>SIL2 SIL3</p> <p>SIGNALING UL LISTED</p> <p> </p>	<table> <tr> <td>Description</td><td>8 Channel Monitored Input Card</td></tr> <tr> <td>Application</td><td>Suitable for fire extinguishing systems (pressure switches, discharge buttons, etc...)</td></tr> <tr> <td>Safety rating</td><td>applicable up to SIL3</td></tr> <tr> <td>Redundancy</td><td>SI-2302-2 model</td></tr> <tr> <td>Line short circuit current</td><td>>115 mA</td></tr> <tr> <td>Channel test</td><td>every 30 seconds</td></tr> <tr> <td>Intrinsic Safety Barriers allowed</td><td>uZ680</td></tr> <tr> <td>Supply voltage</td><td>22-29 V DC</td></tr> <tr> <td>Quiescent current</td><td>14 mA</td></tr> <tr> <td>Operating temperature</td><td>-5 to +50 °C</td></tr> <tr> <td>Storage temperature</td><td>-30 to +80 °C</td></tr> <tr> <td>Maximum humidity</td><td>95% (RH) non condensing</td></tr> <tr> <td>Hot swap capability</td><td>yes</td></tr> </table>	Description	8 Channel Monitored Input Card	Application	Suitable for fire extinguishing systems (pressure switches, discharge buttons, etc...)	Safety rating	applicable up to SIL3	Redundancy	SI-2302-2 model	Line short circuit current	>115 mA	Channel test	every 30 seconds	Intrinsic Safety Barriers allowed	uZ680	Supply voltage	22-29 V DC	Quiescent current	14 mA	Operating temperature	-5 to +50 °C	Storage temperature	-30 to +80 °C	Maximum humidity	95% (RH) non condensing	Hot swap capability	yes
Description	8 Channel Monitored Input Card																										
Application	Suitable for fire extinguishing systems (pressure switches, discharge buttons, etc...)																										
Safety rating	applicable up to SIL3																										
Redundancy	SI-2302-2 model																										
Line short circuit current	>115 mA																										
Channel test	every 30 seconds																										
Intrinsic Safety Barriers allowed	uZ680																										
Supply voltage	22-29 V DC																										
Quiescent current	14 mA																										
Operating temperature	-5 to +50 °C																										
Storage temperature	-30 to +80 °C																										
Maximum humidity	95% (RH) non condensing																										
Hot swap capability	yes																										

PRODUCT	TECHNICAL DATA																										
 <p>SI-2401-1</p> <p>SIL2 SIL3</p> <p>SIGNALING UL LISTED</p> <p> </p>	<table> <tr> <td>Description</td><td>Single Channel 4-20 mA Analog Input Card</td></tr> <tr> <td>Application</td><td>Suitable for transducer control (explosion, air quality, gas, temperature, 4-20 mA general sensors)</td></tr> <tr> <td>Safety rating</td><td>applicable up to SIL3</td></tr> <tr> <td>Redundancy</td><td>SI-2401-2 model</td></tr> <tr> <td>Channel test</td><td>continuously tested</td></tr> <tr> <td>Measuring range</td><td>0-24 mA</td></tr> <tr> <td>Line short circuit condition</td><td>with current >23.5mA</td></tr> <tr> <td>Supply voltage</td><td>22-29 V DC</td></tr> <tr> <td>Quiescent current</td><td>35 mA</td></tr> <tr> <td>Operating temperature</td><td>-5 to +50 °C</td></tr> <tr> <td>Storage temperature</td><td>-30 to +80 °C</td></tr> <tr> <td>Maximum humidity</td><td>95% (RH) non condensing</td></tr> <tr> <td>Hot swap capability</td><td>yes</td></tr> </table>	Description	Single Channel 4-20 mA Analog Input Card	Application	Suitable for transducer control (explosion, air quality, gas, temperature, 4-20 mA general sensors)	Safety rating	applicable up to SIL3	Redundancy	SI-2401-2 model	Channel test	continuously tested	Measuring range	0-24 mA	Line short circuit condition	with current >23.5mA	Supply voltage	22-29 V DC	Quiescent current	35 mA	Operating temperature	-5 to +50 °C	Storage temperature	-30 to +80 °C	Maximum humidity	95% (RH) non condensing	Hot swap capability	yes
Description	Single Channel 4-20 mA Analog Input Card																										
Application	Suitable for transducer control (explosion, air quality, gas, temperature, 4-20 mA general sensors)																										
Safety rating	applicable up to SIL3																										
Redundancy	SI-2401-2 model																										
Channel test	continuously tested																										
Measuring range	0-24 mA																										
Line short circuit condition	with current >23.5mA																										
Supply voltage	22-29 V DC																										
Quiescent current	35 mA																										
Operating temperature	-5 to +50 °C																										
Storage temperature	-30 to +80 °C																										
Maximum humidity	95% (RH) non condensing																										
Hot swap capability	yes																										


Input / Output Cards


PRODUCT		TECHNICAL DATA	
 SI-2402-1	<div>SIL²</div> <div>SIL³</div> <div><div>SIGNALING</div><div></div><div></div><div></div></div>	Description	Dual Channel 4-20 mA Analog Input Card
		Application	Suitable for transducer control (explosion, air quality, gas, temperature, 4-20 mA general sensors)
		Safety rating	applicable up to SIL3
		Redundancy	SI-2402-2 model
		Channel test	continuously tested
		Measuring range	0-24 mA
		Line short circuit condition	with current >23.5 mA
		Supply voltage	22-29 V DC
		Quiescent current	60mA
		Operating temperature	-5 to +50 °C
Storage temperature	-30 to +80 °C		
Maximum humidity	95% (RH) non condensing		
Hot swap capability	yes		


PRODUCT		TECHNICAL DATA	
 SI-2403-1	<div>SIL²</div> <div>SIL³</div> <div><div>SIGNALING</div><div></div><div></div><div></div></div>	Description	8 Channel 4-20 mA Analog Input Card
		Application	Suitable for transducer control (explosion, air quality, gas, temperature, 4-20 mA general sensors)
		Safety rating	applicable up to SIL3
		Redundancy	SI-2403-2 model
		Channel test	continuously tested
		Measuring range	0-24 mA
		Line short circuit condition	with current >23.5mA
		Supply voltage	22-29 V DC
		Quiescent current	13 mA
		Operating temperature	-5 to +50 °C
Storage temperature	-30 to +80 °C		
Maximum humidity	95% (RH) non condensing		
Hot swap capability	yes		

PRODUCT		TECHNICAL DATA	
 SI-2501-1	<div>SIL²</div> <div>SIL³</div> <div><div>SIGNALING</div><div></div><div></div><div></div></div>	Description	8 Channel 500 mA Monitored Output Card
		Application	Suitable for controlling directional & releasing solenoid valves, audible/visual alarm devices
		Safety rating	applicable up to SIL3
		Redundancy	SI-2501-2 model
		Channel test	every 2 seconds
		Max. output current	500 mA
		Automatic output protection	Yes
		Supply voltage	22-29 V DC
		Quiescent current	35 mA
		Operating temperature	-5 to +50 °C
Storage temperature	-30 to +80 °C		
Maximum humidity	95% (RH) non condensing		
Hot swap capability	yes		


Input / Output Cards


PRODUCT	TECHNICAL DATA																								
 <p>SI-2502-1</p> <p>SIL2 SIL3</p> <p>SIGNALING UL LISTED</p> <p>UL ELECTRONICS ELECTRONICS</p> <p>UL ELECTRONICS ELECTRONICS</p>	<table> <tr> <td>Description</td><td>16 Channel 250 mA Non-Monitored Output Card</td></tr> <tr> <td>Application</td><td>Suitable for non-monitored open collector outputs</td></tr> <tr> <td>Redundancy</td><td>No</td></tr> <tr> <td>Channel test</td><td>No</td></tr> <tr> <td>Max. output current</td><td>250 mA</td></tr> <tr> <td>Automatic output protection</td><td>No</td></tr> <tr> <td>Supply voltage</td><td>22-29 V DC</td></tr> <tr> <td>Quiescent current</td><td>10 mA</td></tr> <tr> <td>Operating temperature</td><td>-5 to +50 °C</td></tr> <tr> <td>Storage temperature</td><td>-30 to +80 °C</td></tr> <tr> <td>Maximum humidity</td><td>95% (RH) non condensing</td></tr> <tr> <td>Hot swap capability</td><td>yes</td></tr> </table>	Description	16 Channel 250 mA Non-Monitored Output Card	Application	Suitable for non-monitored open collector outputs	Redundancy	No	Channel test	No	Max. output current	250 mA	Automatic output protection	No	Supply voltage	22-29 V DC	Quiescent current	10 mA	Operating temperature	-5 to +50 °C	Storage temperature	-30 to +80 °C	Maximum humidity	95% (RH) non condensing	Hot swap capability	yes
Description	16 Channel 250 mA Non-Monitored Output Card																								
Application	Suitable for non-monitored open collector outputs																								
Redundancy	No																								
Channel test	No																								
Max. output current	250 mA																								
Automatic output protection	No																								
Supply voltage	22-29 V DC																								
Quiescent current	10 mA																								
Operating temperature	-5 to +50 °C																								
Storage temperature	-30 to +80 °C																								
Maximum humidity	95% (RH) non condensing																								
Hot swap capability	yes																								

PRODUCT	TECHNICAL DATA																								
 <p>SI-2503-1</p> <p>SIL2 SIL3</p> <p>SIGNALING UL LISTED</p> <p>UL ELECTRONICS ELECTRONICS</p> <p>UL ELECTRONICS ELECTRONICS</p>	<table> <tr> <td>Description</td><td>8 Channel 250mA Monitored Outputs Card</td></tr> <tr> <td>Application</td><td>Suitable for sounder controls</td></tr> <tr> <td>Redundancy</td><td>No</td></tr> <tr> <td>Channel test</td><td>No</td></tr> <tr> <td>Max. output current</td><td>250 mA</td></tr> <tr> <td>Automatic output protection</td><td>Yes</td></tr> <tr> <td>Supply voltage</td><td>22-29 V DC</td></tr> <tr> <td>Quiescent current</td><td>38 mA</td></tr> <tr> <td>Operating temperature</td><td>-5 to +50 °C</td></tr> <tr> <td>Storage temperature</td><td>-30 to +80 °C</td></tr> <tr> <td>Maximum humidity</td><td>95% (RH) non condensing</td></tr> <tr> <td>Hot swap capability</td><td>yes</td></tr> </table>	Description	8 Channel 250mA Monitored Outputs Card	Application	Suitable for sounder controls	Redundancy	No	Channel test	No	Max. output current	250 mA	Automatic output protection	Yes	Supply voltage	22-29 V DC	Quiescent current	38 mA	Operating temperature	-5 to +50 °C	Storage temperature	-30 to +80 °C	Maximum humidity	95% (RH) non condensing	Hot swap capability	yes
Description	8 Channel 250mA Monitored Outputs Card																								
Application	Suitable for sounder controls																								
Redundancy	No																								
Channel test	No																								
Max. output current	250 mA																								
Automatic output protection	Yes																								
Supply voltage	22-29 V DC																								
Quiescent current	38 mA																								
Operating temperature	-5 to +50 °C																								
Storage temperature	-30 to +80 °C																								
Maximum humidity	95% (RH) non condensing																								
Hot swap capability	yes																								

PRODUCT	TECHNICAL DATA																								
 <p>SI-2504-1</p> <p>SIL2 SIL3</p> <p>SIGNALING UL LISTED</p> <p>UL ELECTRONICS ELECTRONICS</p> <p>UL ELECTRONICS ELECTRONICS</p>	<table> <tr> <td>Description</td><td>4 Channel 2 A Monitored Output Card</td></tr> <tr> <td>Application</td><td>Suitable to control automatic fire extinguishing systems</td></tr> <tr> <td>Safety rating</td><td>applicable up to SIL3</td></tr> <tr> <td>Redundancy</td><td>SI-2504-2 model</td></tr> <tr> <td>Channel test</td><td>every 2 seconds</td></tr> <tr> <td>Max. output current</td><td>2 A</td></tr> <tr> <td>Supply voltage</td><td>22-29 V DC</td></tr> <tr> <td>Quiescent current</td><td>20 mA</td></tr> <tr> <td>Operating temperature</td><td>-5 to +50 °C</td></tr> <tr> <td>Storage temperature</td><td>-30 to +80 °C</td></tr> <tr> <td>Maximum humidity</td><td>95% (RH) non condensing</td></tr> <tr> <td>Hot swap capability</td><td>yes</td></tr> </table>	Description	4 Channel 2 A Monitored Output Card	Application	Suitable to control automatic fire extinguishing systems	Safety rating	applicable up to SIL3	Redundancy	SI-2504-2 model	Channel test	every 2 seconds	Max. output current	2 A	Supply voltage	22-29 V DC	Quiescent current	20 mA	Operating temperature	-5 to +50 °C	Storage temperature	-30 to +80 °C	Maximum humidity	95% (RH) non condensing	Hot swap capability	yes
Description	4 Channel 2 A Monitored Output Card																								
Application	Suitable to control automatic fire extinguishing systems																								
Safety rating	applicable up to SIL3																								
Redundancy	SI-2504-2 model																								
Channel test	every 2 seconds																								
Max. output current	2 A																								
Supply voltage	22-29 V DC																								
Quiescent current	20 mA																								
Operating temperature	-5 to +50 °C																								
Storage temperature	-30 to +80 °C																								
Maximum humidity	95% (RH) non condensing																								
Hot swap capability	yes																								

Input / Output Cards

PRODUCT	TECHNICAL DATA
 <p>SIL2 SIL3</p> <p>SIGNALING UL LISTED</p> <p>SI-2601-1</p>	<p>Description 8 Channel Outputs Control Card</p>
	<p>Application Used to control fire extinguishing systems typical logics, such as discharge relay & reset inhibit time</p>
	<p>Safety rating applicable up to SIL3</p>
	<p>Redundancy Yes</p>
	<p>Max. output current 250 mA</p>
	<p>Automatic output protection No</p>
	<p>Supply voltage 22-29 V DC</p>
	<p>Quiescent current 10 mA</p>
	<p>Operating temperature -5 to +50 °C</p>
	<p>Storage temperature -30 to +80 °C</p>
	<p>Maximum humidity 95% (RH) non condensing</p>
	<p>Hot swap capability yes</p>


PRODUCT	TECHNICAL DATA
 <p>SIL2 SIL3</p> <p>SIGNALING UL LISTED</p> <p>SI-2602-1</p>	<p>Description Logic Card</p>
	<p>Application To control 100 S-R flip flops, toggles & timers</p>
	<p>Redundancy Yes</p>
	<p>Maximum number of S-R flip flops 100</p>
	<p>Maximum number of logic Toggles 100</p>
	<p>Maximum number of Timers 100</p>
	<p>Timer range 0 to 255 seconds</p>
	<p>Supply voltage 22-29 V DC</p>
	<p>Quiescent current 9 mA</p>
	<p>Operating temperature -5 to +50 °C</p>
	<p>Storage temperature -30 to +80 °C</p>
	<p>Maximum humidity 95% (RH) non condensing</p>
	<p>Hot swap capability yes</p>

System Architecture

The SI-90 control panel is a high technology product created for controlling safety-related systems and equipment. It is characterised by easy configuration and programming, combined with excellent reliability and system diagnosis. SI-90 is similar to a “safety PLC” and can be configured and programmed for carrying out, in compliance with applicable standards, integrated safety functions such as:

- fire detection.
- gas detection.
- burglar alarm.
- technological control.

The SI-90 can also interact with other control panels of the same type and with supervisory systems via both standard and proprietary protocols such as TCP/IP Ethernet, Modbus RTU, or OPC Server.

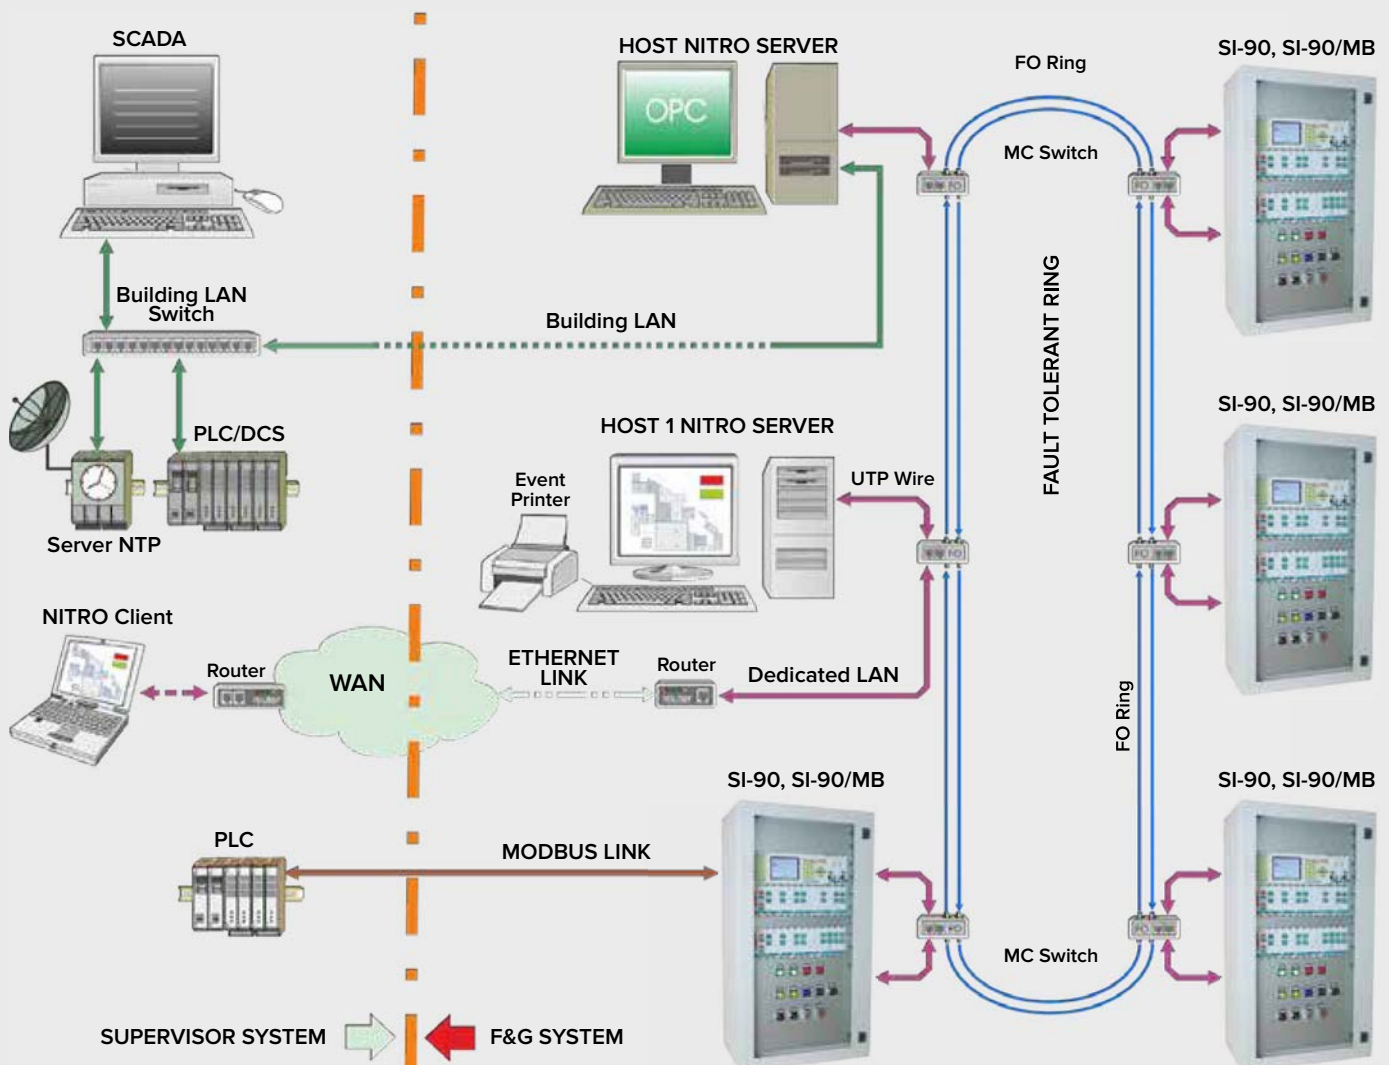

Graphic Supervision Program

Nitro

Nitro is a supervision program that allows a computer-based event management of fire and crime squad systems through animation and graphic pages. Basically Nitro allows to manage the activity of the installation without physically moving to it. Nitro program can be installed on one or more PCs that will connect to the control panel with a LAN Ethernet or serial line.

Nitro has an easy configuration in order to adapt to the fire and gas installation requirements. From the main panel, the administrator can modify the graphic pages and the fire plant features on the map.

Moreover, the administrator can decide all possible actions for each level of access and the graphic pages visible on each PC. In addition to the basic functions, the program NITRO can also have some on-demand options such as NITRO VIDEO or be customized according to the client's needs.

Features

- PC installed (MS Windows).
- Compatible with both SI-90 and SI-90/MB control panels.
- Access and configuration with USB protection device.
- Connection to the plants through LAN Ethernet or serial line.
- Choose of language – Italian, English, French and on request.
- Import zone names and entities from panels.
- Maps in bitmap format (bmp, jpg, etc.).
- Past events with filter to see and export data.
- On line manual.

This image shows a single sheet of white paper with horizontal dashed lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



SHIELD FIRE, SAFETY & SECURITY LTD

Unit 3, Endeavour Drive, Basildon-Essex, SS14 3WF, United Kingdom
Tel: +44 1708 377731 Fax: +44 1708 347637, E-mail: Shielduk@shieldglobal.com
www.shieldglobal.com