

DELIVERY HOSE COUPLING



PRODUCT DESCRIPTION

SHIELD couplings are suitable for use with delivery hose and for fire fighting purposes. The delivery hose couplings are of instantaneous pattern, pull release type with ribbed tail and are manufactured to comply to BS 336:2010 standards. The couplings are suitable for use at working pressure not exceeding 15 bar.

FEATURES

- BSI Kitemark certified.
- Castings are clean, sound and free from gross porosity.
- Machined surface is within tolerance and is in accordance with BS 1134-2.
- Coupling washers are made of natural rubber to BS1154.
- Plungers are of self-locking type.




SDAC - 38 RT
(Aluminium Coupling)

SDAC - 65 RT
(Aluminium Coupling)

SDCC - 65 RT
(Copper Alloy Coupling)

SPECIFICATIONS

Coupling Type	Instantaneous Male / Female coupling with pull release
Tailed Ends	Ribbed tail type
Test Pressure	22.5 Bar for 1 minute

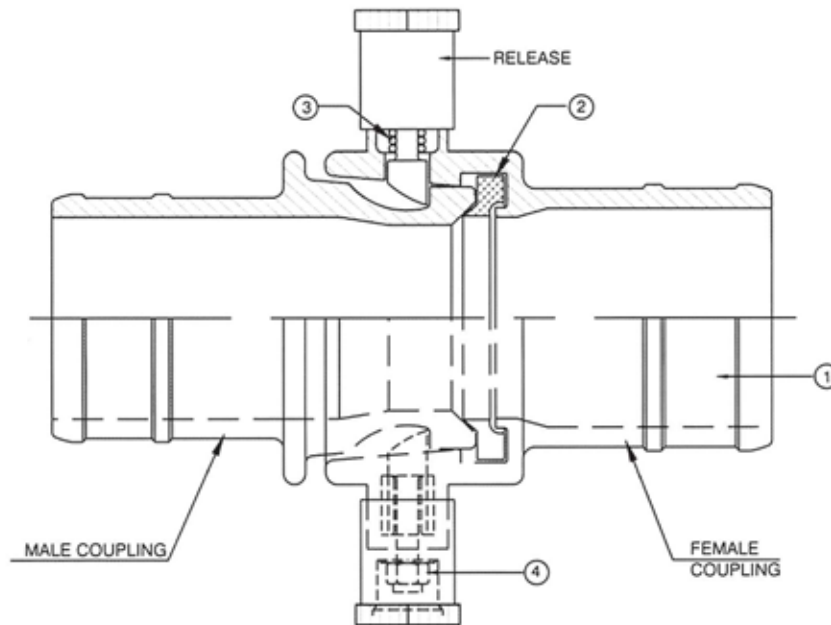

Sl. Nto.	Description	Material
1	Body Male/Female Coupling	a. Aluminium to BS EN 1706:1998 b. Copper Alloy to BS EN 12163:2011
2	Washer	Rubber
3	Spring	Spring Steel
4	Self Locking Nut	Aluminium