

FIREFIGHTER PHONE SYSTEM2 FIREFIGHTER PHONE ASSEMBLIES



FEATURES

- ✓ Compatible with NEO Series Command Centers.
- ✓ Class B Supervised Interface Wiring.
- ✓ Up to Two (2) NX-TEL2-MCCS[/P] per Riser Module.
- ✓ Standard or Push-to-Talk integral phone.

Ratings

- ✓ All Circuits Power Limited.
- ✓ Terminals support 12-22 AWG Wire.

LISTINGS AND APPROVALS

- ✓ ETL ANSI/UL 864.

DESCRIPTION

The NX-TEL2-MCCS and NX-TEL2-MCCS/P are assemblies that include a firefighter phone, phone enclosure and interface module.


The difference between the NX-TEL2-MCCS and NX-TEL2-MCCS/P is that the NX-TEL2-MCCS/P includes a push-to-talk firefighter phone. Both assemblies interface the Firefighter

Phone System2 command center telephone with the Shield NX-TEL2-RISE riser module.

Both the Shield CCM-01-ID2 (3x3 command center) and CCM-02-ID2 (3x5 command center) inner doors can support an NX-TEL2-MCCS[/P] assembly, mounted in the bottom left side double aperture.

TECHNICAL DATA SHEET

WIRING DIAGRAM

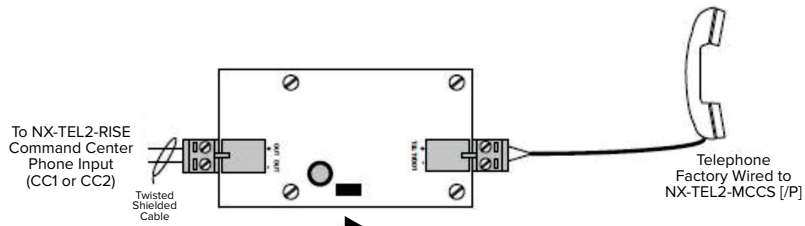

ORDERING INFORMATION

NX-TEL2-MCCS

Command Center Firefighter Phone Assembly with Standard Phone

NX-TEL2-MCCS-P

Command Center Firefighter Phone Assembly with Push-to-Talk (PTT) Phone